

THE PUP[®]

Specialty-Use Side Loader



"The Pup is perfect for parks and trails."

Perfect for collecting refuse or recyclables in restricted public areas.

The PUP is ideal for parks and recs, beaches and resorts, campuses, zoos and mobile home courts — wherever larger refuse trucks can't go or are not practical. Choice of truck-mounted or trailer-mounted models with barrel and cart loading options.


Standard Features:

- packs a ton — fits on one-ton trucks
- loads from both sides
- totally enclosed hopper — keeps trash contained
- full-eject unloading, no body tipping
- truck-mounted or trailer-mounted models



PUP trailer with gas or diesel engine

WAYNE[®]
ENGINEERED FOR PERFORMANCE
www.WayneUSA.com

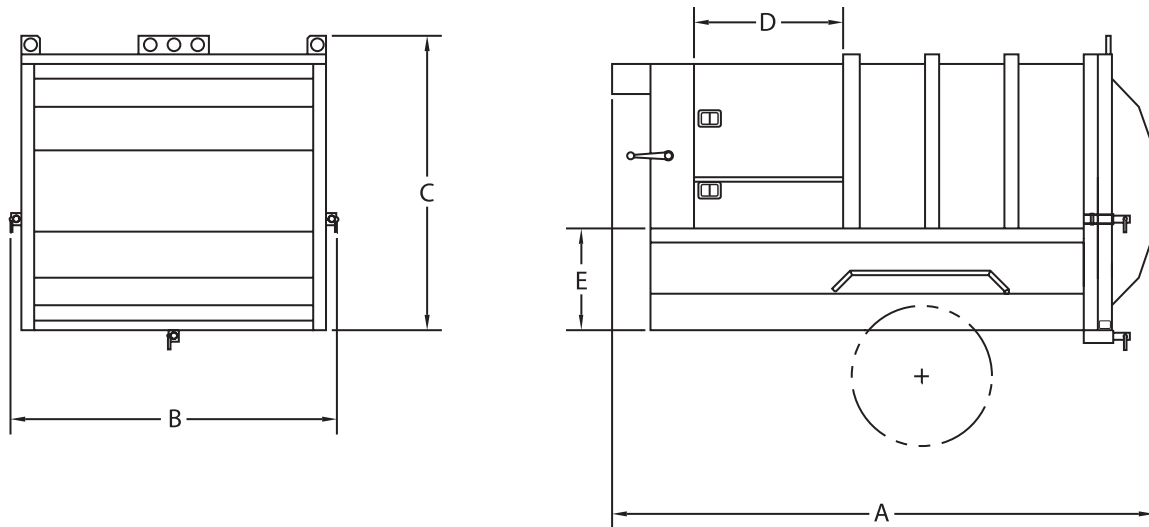

BODY SPECIFICATIONS

	chassis-mounted	trailer-mounted
A: Total length	116"	180"
B: Total width	70"	70"
C: Total height above frame, body height	63"	63"
D: Loading area (sill) width	31"	31"
E: Loading area (sill) height above frame	25"	22"
Empty body weight	2,300 lbs.	3,500 lbs.

Body

- Body size — 6 cu. yd.
- Fillable body capacity — 4 cu. yd.
- Practical fillable loading area — 2 cu. yd.
- Manual rear door(s), standard
- Horizontal push load ejection
- Standard body can be loaded from both sides
- 11 gauge standard body and hopper thickness
- Meets all ANSI Z245.1 safety standards

Hydraulic Specifications

- System working pressure — 1,500 PSI max
- Standard oil flow — 12 GPM, chassis-mounted; 8 GPM, trailer-mounted
- Standard operating pump RPM — 1000, chassis-mounted
- Reservoir capacity — 12 gal.
- Standard loading area cycle time:
 - 15 seconds, chassis-mounted;
 - 18 seconds, trailer mounted
- Two 2½" packing/ejection cylinders
- Return filter — 10 micron return

Chassis Requirements

- 60" minimum useable cab-to-axle length
- 10,000 lbs. GVWR minimum, for estimated average payload

Optional Equipment

- Barrel dumper — right or left side
- Cart tipper — right or left side
- European cart tipper — right or left side
- Strobe light or rotating beacon
- Work light — right or left side
- Hydraulic tailgate with auto lock

J.D. Honigberg International, Inc.

650 Dundee Road, Suite 150
Northbrook, IL 60062 USA
Tel: 847-412-0200

Email: powerequipment@jdhintl.com
www.jdhpowerequipment.com

WAYNE[®]
ENGINEERED FOR PERFORMANCE

701 Performance Drive, Cedar Falls, IA 50613
Phone: (319) 266-1721 • Fax: (319) 266-8207

Tollfree: 888-66WAYNE
www.WayneUSA.com