

FURY


LIGHT WEIGHT REAR LOADER



www.WayneUSA.com



WAYNE

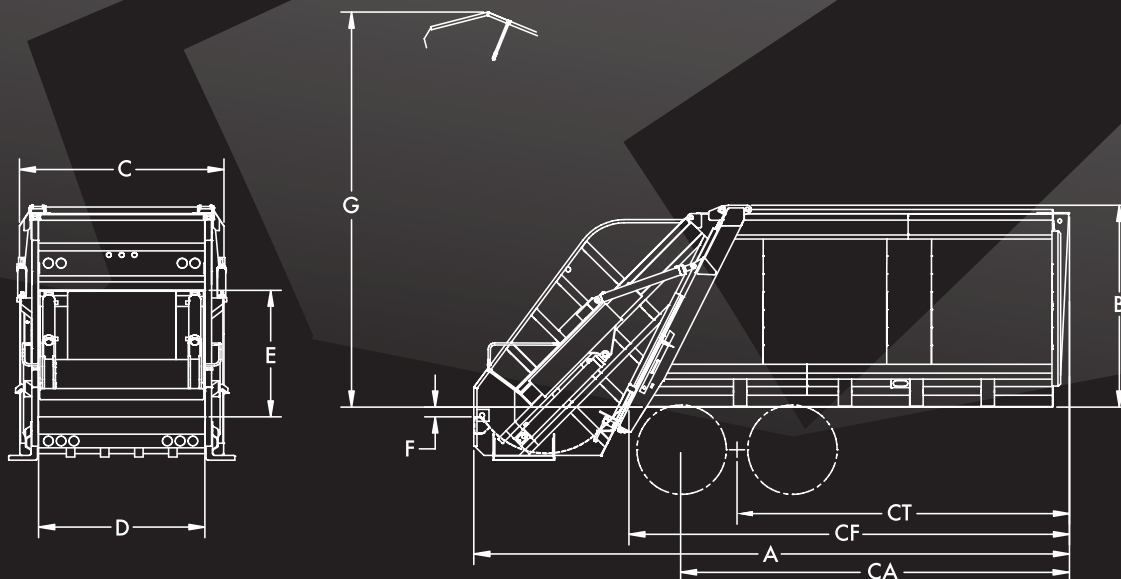

BODY SPECIFICATIONS

	16 cu. yd.	20 cu. yd.	25 cu. yd.
A: Overall Length	216"	242"	278"
B: Height Above Chassis Frame	95"	95"	95"
C: Body Width	96"	96"	96"
D: Hopper Opening Width	78"	78"	78"
E: Hopper Opening Height	66"	66"	66"
F: Loading Sill Below Chassis Frame	2"	2"	2"
G: Height Above Chassis Frame - Tailgate Raised	182"	182"	182"
CA: Cab to Axle	114"	140"	-
CT: Cab to Tandem	-	120"	156"
CF: Min. Usable CAT to End of Frame	145"	171"	205"
Dynamic Hopper Capacity (Cu. Yd./Min.)	6.7	6.7	6.7
Volumetric Hopper Capacity	2.8	2.8	2.8
Volumetric Hopper Capacity w/ CLD	3.1	3.1	3.1
Approx. Body Weight	12,300 lbs.	12,900 lbs.	14,100 lbs.
Truck GVWR Recommended - Single	31,000 lbs.	33,000 lbs.	-
Truck GVWR Recommended - Tandem	-	47,000 lbs.	52,000 lbs.
Pack Cycle Time	20-24 seconds	20-24 seconds	20-24 seconds

FEATURES

- Curved Shell Body
- Auto back-pack
- Engine accelerator
- Reservoir sight gauge
- Chrome cylinder rods
- 30" x 34" access door (streetside)
- Backup alarm
- Driver alert buzzer (curbside)
- High-mount rear light bar
- Work lights
- LED ANSI/DOT lighting
- 12 mo. body/24 mo. cylinder warranty

HYDRAULIC SYSTEM

- Oil Reservoir: 50 gal.
- Oil Flow w/ Standard Pump: 36 GPM
- Operating Pressure: 2500 PSI
- Hose Burst Ratio: 4 to 1
- Return Filter: 10 micron
- Slide Cylinders: 4 1/2"
- Sweep Cylinders: 4 1/2"
- Eject Cylinder (16 & 20 YD): 5"
- Eject Cylinder (25 YD): 5 1/4"
- Tailgate Lift: 3 1/2"

BODY CONSTRUCTION

- Roof: 10 gauge GR80
- Sides: 10 gauge GR80

- Floor: 10 gauge GR80
- Ejection Panel: 10 gauge GR80

HOPPER CONSTRUCTION

- Tailgate Upper: 10 gauge GR80
- Tailgate Lower: 7 gauge GR50
- Hopper Floor: 3/16" GR100 or Hardox
- Sweep Face: 3/16" GR100 or Hardox

OPTIONS

- 12,000 lb. reeving winch
- 8,000 lb. overhead drum winch
- Hydraulically operated roll bar
- Single or dual cart tippers
- Rear camera system (5" color LCD)

ENGINEERED FOR PERFORMANCE



701 Performance Drive
Cedar Falls, IA 50613
Phone: (319) 266-1721
Fax: (319) 266-8207