

Infrared Heaters

Walk Behind / Paver Mounted

Marathon's walk-behind and paver mounted infrared units make it easy to renew, repair or resurface asphalt. Various styles and sizes are available to suit all your job requirements.

HEPR36

HEPR36 - The Portable Hand Patcher


The perfect patcher for small road repair crews! With six infrared generators, it will repair and resurface bumps, ridges, traffic heaves, high spots, cracks around manholes and utility cuts, without burning the asphalt.



HEPR8DW

HEPR8DW - Crack Sealer


This is the unit for sealing cracks and joints PERMANENTLY. The HEPR8DW wheel mounted unit produces 120,000 BTU's from two stainless steel infrared generators and is ideal for repairing small areas in driveways and parking lots as well as cracks in highways and roads. Unit comes complete with lighting torch, hose, regulator and bottle connector.

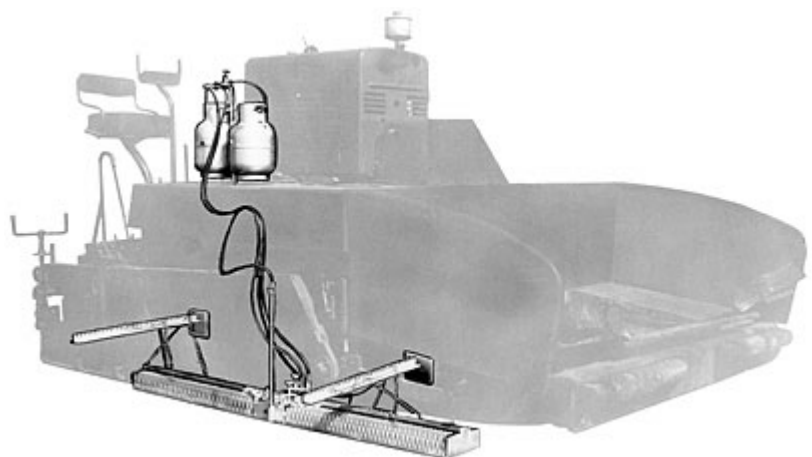

HEPR8L

HEPR8L - Joint Sealer

Penetrating heat from this infrared joint sealer quickly softens the hardened asphalt mat edge for bonding with newly laid mat. The new and previously laid asphalt become completely fused achieving a moisture proof, weather-tight and permanently sealed joint. The stainless steel reflectors increase efficiency by concentrating the infrared rays to the asphalt area. This unit comes standard with a field kit which automatically shuts off the joint sealer's burners when the paving machine stops and relights them by the pilot as soon as the paver begins moving again.

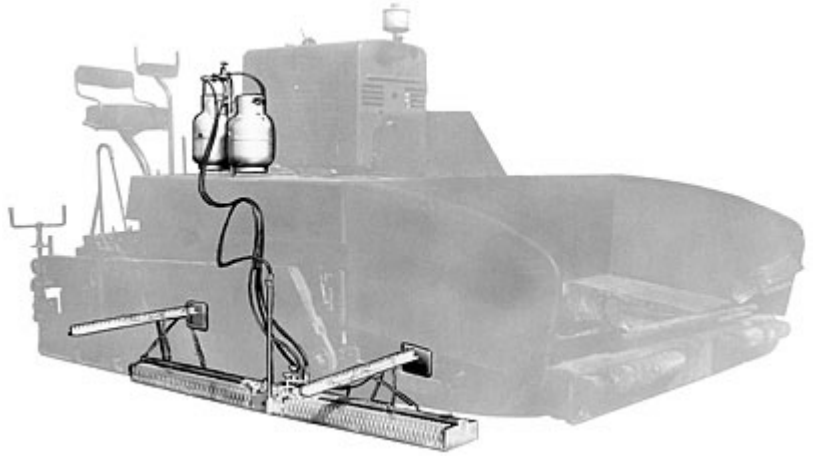

Models	HEPR36	HEPR8DW	HEPR8L
Mount Type	Wheeled	Wheeled	Paver
Shipping Weight	120 lb (55 kg)	100 lb (45 kg)	80 lb (36 kg)
Dimensions			
Overall Length	84" (213 cm)	95" (241 cm)	105" (267 cm)
Overall Width	36" (91 cm)	14" (36 cm)	10" (25 cm)
Heater Unit Length	36" (91 cm)	48" (122 cm)	96" (244 cm)
Heater Unit Width	36" (91 cm)	10" (25 cm)	10" (25 cm)
BTU's	360,000 BTU's	120,000 BTU's	240,000 BTU's
Pilot Light	n/a	Standard	Standard
Lighting Torch	Standard	Standard	Standard
Pressure Regulator	Standard	Standard	Standard
Wheels	2" x 8" steel	2" x 8" steel	n/a

Specifications subject to change without notice.

Infrared Heaters

Trailer Mount

Marathon's trailer mounted combination hot box/infrared units are designed for larger asphalt repairs and offer the greatest amount of adjustable heat without the use of fans. These units are available in various sizes with added versatility to accommodate smaller jobs.



IPRS96V

Features & Benefits

- Heavy duty channel iron frame.
- Long lasting all welded construction – not bolted.
- Industrial grade axle(s) with leaf spring suspension and electric brakes.
- Adjustable hitch with 3" pintle eye and safety chains.
- Highly polished stainless steel reflectors concentrate heat where needed.
- Vertical height adjustment allows operator to fine tune amount of heat applied.
- The amount of heat applied is further controlled with separate temperature control zones.
- Pilot flame system allows individual zones to be turned on and off without need for manual relighting.
- Stainless steel construction on all high temperature components to improve durability and limit corrosion.
- 100 lb. propane bottle holders come complete with hold down straps.
- Conveniently located heavy duty, adjustable screw type jack.
- All necessary stop and directional signal lights.
- Increased corrosion resistance with epoxy primer and standard blue paint finish.



HEPR96V

Models	HEPR52V	HEPR96V	IPRS96V
Shipping Weight	1100 lb (500 kg)	2100 lb (954 kg)	4664 lb (2120 kg)
Dimensions			
Overall Length	120" (305 cm)	139" (353 cm)	176" (447 cm)
Overall Width	52" (132 cm)	96" (244 cm)	96" (244 cm)
Heater Unit Length	48" (122 cm)	48" (122 cm)	48" (122 cm)
Heater Unit Width	52" (132 cm)	96" (244 cm)	96" (244 cm)
Asphalt Hot Box Capacity	n/a	n/a	2 Ton (4000 lbs)
BTU's	600,000 BTU's	1,200,000 BTU's	1,200,000 BTU's
Propane Bottle Holders	2	4	4
Pilot Light	Standard	Standard	Standard
Lighting Torch	Standard	Standard	Standard
Pressure Regulator	Standard	Standard	Standard
Suspension			
Axle	Single	Tandem	Tandem
Capacity	3500 lb (1591 kg) 3	3500 lb (1591 kg) each	7000 lb (3175 kg) each
Tires	(2) 225/75R15	(4) 225/75R15	(4) 235/85R16

Specifications subject to change without notice.