

Mini Chainsaw


MiniSaw

The Mini Chainsaw is RGC's newest addition to the finest line of hydraulic concrete cutting saws on the market. Available with 13 in. or 15 in. cutting depths and manufactured with a cast aluminum frame, it is the lightweight, portable option for all concrete cutters. Weighing in at around 15 lbs., it is a third the weight of other concrete cutting chainsaws.

The MiniSaw can be powered by an RGC HydraPak or by any other compatible power source.

Specifications

Model	MiniSaw w/ 13 in. Bar	MiniSaw w/ 15 in. Bar
Cutting Depth	13 in. (33.0 cm)	15 in. (38.1 cm)
Bar Size (approx.)	15 in. x 2.25 in. (38.1 cm x 5.7 cm)	17 in. x 2.25 in. (43.2 cm x 5.7 cm)
Flow	8 gpm (30 lpm)	8 gpm (30 lpm)
Pressure	2000 - 2250 psi (138 -155 bar)	2000 - 2250 psi (138 -155 bar)
Water Flow	2.5 gpm @ 50 psi (9.5 lpm @ 3.5 bar)	2.5 gpm @ 50 psi (9.5 lpm @ 3.5 bar)

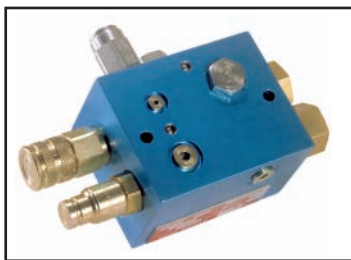

Flow Divider

Flow Divider Features & Benefits

- Use a Flow Divider to conveniently operate your RGC tools from another power source.
- Specify output required: 4 - 25 gpm.
- Accepts a maximum input flow of 25 gpm at 3000 psi.
- Bypass returns excess flow to tank side of hydraulic power source.
- Quick-disconnect fittings on tool side are standard.



MiniSaw

MiniSaw Features & Benefits

- Makes clean plunge, bottom, notch, trim, and corner cuts without over cutting.
- Equipped with a powerful hydraulic motor (requires 8 gpm @ 2000 - 2250 psi).
- The trigger lockout safety feature is standard.
- Dual function trigger starts and stops tool and water simultaneously.
- Water flow system delivers maximum lubrication, cooling, and abrasive flushing through eight internal bar channels.
- Lightweight cast aluminum frame is ergonomically designed to enhance cutting precision while reducing operator fatigue.
- A roller nose sprocket maximizes chain and bar life.
- 15 in. bar provides a full 15 in. cutting depth.
- 13 in. bar provides a full 13 in. cutting depth.
- Choose from two diamond segmented chains:
 - SL25 chains cut medium-soft to very hard aggregate with moderate to heavy steel reinforcing.
 - SL45 chains cut green concrete, brick and concrete block without steel reinforcing.
- 55 diamond cutting segments are laser welded to high carbon steel chain for use with the 15 in. bar.
- 50 diamond cutting segments are laser welded to a high carbon steel chain for use with the 13 in. bar.

** Additional chain information can be found on the back of this page.*



J.D. Honigberg International, Inc.

650 Dundee Road, Suite 150, Northbrook, IL 60062 USA

Tel: 847-412-0200 · Email: powerequipment@jdhintl.com ·

www.jdhpowerequipment.com