



Efficient 6 yd 3 Manual Side Loader



Add a barrel dumper or a cart dumper to either side.





This small body side loader is built for a life time of collection. The PUP is ideal for parks, bicycle trails, beaches, resorts, recreation areas, zoos, campuses, mobile home courts and small-gated communities. The easy access side doors allow loading of bags, cans & boxes. Add the barrel or cart dumper and handle residential trash containers.


The PUP – the little packer with big performance.

WAYNE Pup® Standard Features:

- Rear fenders
- Mudflaps
- Engine accelerator
- Back-up alarm
- Upper & lower hopper doors
- Manual controls both side of body
- Chrome cylinders
- Reservoir sight gauge
- ICC lights and reflectors
- Manual tailgate
- Safety interlocks





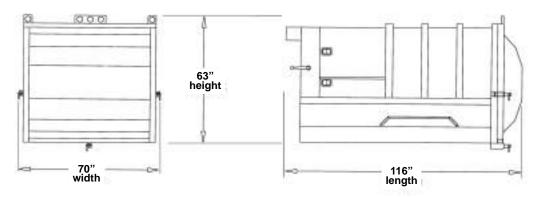

BODY SPECIFICATIONS	PUP	PUP TRAILER
Advertised body size (cubic yards)	6	6
Fillable body capacity (cubic yards)	4	4
Practical fillable loading area (cubic yards)	2	2
Empty body weight (lbs.)	2300	3500
Total length of body (inches)	116	180
Total width of body (inches)	70	70
Body height above truck frame	63	63
Type of rear door(s) standard (manual or hydraulic)	Manual	Manual
Type of load ejection (horizontal push or gravity dump)	Horiz. push	Horiz. push
Loading area width (sill width) (inches)	31	31
· Loading area height above frame (sill height) (inches)	22	22
Can the standard body be loaded from both sides?	Yes	Yes
Standard floor thickness in hopper and body	11 ga.	11 ga.
· Meets all ANSI Z245.1 safety standards as standard equipment	Yes	Yes

Illustrations and/or specifications published herein are informational in nature and shall not be construed to warrant suitability of the unit for any particular purpose, as individual performance may vary. WAYNE ENGINEERING CORPORATION, reserves the right under its Product Improvement Program to, without notice, modify construction and/or design and furnish equipment that varies from the illustrations or specifications contained herein. Except as specifically provided for in WAYNE ENGINEERING CORPORATION New Equipment Warranty, there are no other warranties, expressed or implied, including but not limited to the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, which are hereby disclaimed.

Distributed by:



STANDARD FEATURES

- · Rear fenders
- Mudflaps
- · Engine accelerator
- · Back-up alarm
- Upper & lower hopper doors
- · Manual controls both side of body
- · Chrome cylinders
- · Reservoir sight gauge
- · ICC lights and reflectors
- Manual tailgate
- · Safety interlocks

TRAILER MOUNT STANDARD FEATURES

- 11 Horsepower gas engine
- 12 Volt electric starter w/battery
- Fuel tank
- 2" Ball coupler
- 2 Safety chains
- · Electric brake package w/springs
- 75Rx15 Tires
- · Break-away coupler

HYDRAULIC SYSTEM

Cylinders

• (2) 2.5" Double-acting pack/ejection

<u>Pump – Gear Type</u>

• Capacity —-12GPM @ 1,500 RPM

Hydraulic Tank

- · Capacity 12 gallons
- Location Top front of body
- Sight gauge on tank
- Filter 10 micron return line filter

LOADING AREA CYCLE TIME

 15 seconds w/standard pump and PTO

BODY CONSTRUCTION

- Sides 11 gauge 50,000 PSI
- Top 11 gauge 50,000 PSI
- Floor 11 gauge 50,000 PSI
- Tailgate —11 gauge 50,000 PSI

PACKER PANEL CONSTRUCTION

- · Packer and side plates
- 11 gauge 50,000

OPTIONAL EQUIPMENT

- · Barrel dumper
- Right or left side
- · Cart dumper
- Right or left side
- · European cart dumper
- Right or left side
- Strobe light or rotating beacon
- Work light
- Right or left side
- Waste management decal and image package

OPTIONAL FOR TRAILER MOUNT

- · 23 horsepower engine
- Diesel engine